


规格/TECHNICAL SPECIFICATIONS


型号/MODEL NUMBER:	ILENS144-COB55-36-H
透镜尺寸/LENS DIMENSIONS:	Φ55.0*34.0MM
支架尺寸/HOLDER DIMENSIONS:	Φ55.0*35.6MM
定位方式/FASTENING:	锁螺丝/Screw
是否符合ROHS/ROHS COMPLIANT:	是/YES



H320M1

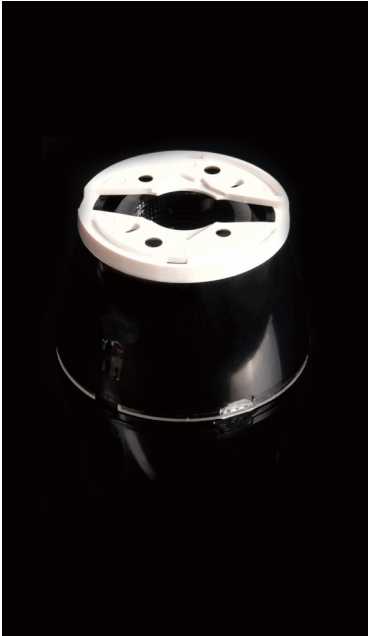

H320M1

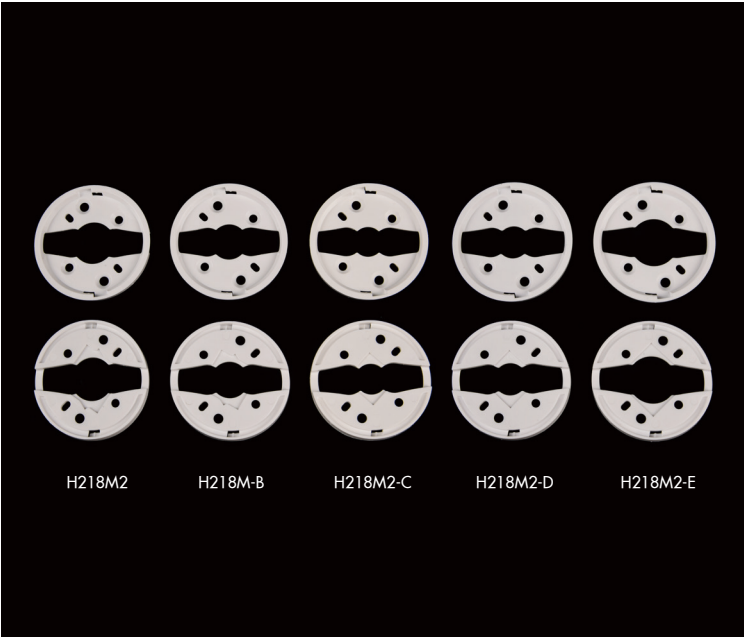

H218M2

H218M-B

H218M2-C

H218M2-D

H218M2-E

Holder Part No./支架零件号	Colour /颜色	Specification/规格	Matched led/匹配光源	Fastening/固定
H320M1	Black/黑色		/	Clips 卡扣
H218M2	White/白色		*Holder matched leds/支架匹配光源: CREE: 13xx/15xx Bridgelux : V10-Gen6/V13-Gen6	Screw 锁螺丝
H218M-B	White/白色		*Holder matched leds/支架匹配光源: CREE: 13xx/15xx Citizen:CLU700/CLU028/CLU020 Luminus:CXM-2/CXM-4/CXM-6/CXM-9 Bridgelux : V3-HD/V4-HD/V10-G7 V10-GEN6/V13-GEN6	Screw 锁螺丝
H218M2-C	White/白色		*Holder matched leds/支架匹配光源: CREE: 13xx Citizen:CLu700/CLU028/CLU020 Luminus:CXM2/CXM-4/CXM 6/CXM-9 Bridgelux:V3 HD/V4 HD/V10-G7	Screw 锁螺丝
H218M2-D	White/白色		*Holder matched leds/支架匹配光源: Luminus:CHM-9	Screw 锁螺丝
H218M2-E	White/白色		*Holder matched leds/支架匹配光源: CITIZEN:CLU713/CLU723CLU038/CLU030 Luminus:CXM-11/CXM-14 Bridgelux:V9 HD/V11 HD/V13-G7	Screw 锁螺丝


说明/CHARACTERISTIC:

- 透镜有多种不同的配光角度。
The lens have multiple types beam angles.
- 不同的支架来匹配不同LED, 锁螺丝定位安装。
With different types brackets to match different leds, Screw positioning.
- 兼容多种灯珠。
Compatible with various led beads.
- 适用于室内照明。
Suitable for indoor lighting.
- 与市面上同类镜头相比, 光效更好, 光斑更漂亮, 兼容性更好, 特别是非常低的炫光值。
Compared with similar type lenses on the market,with higher efficiency,more beautiful spot and better compatibility.
Anti-glare lens with very low UGR


I LENS144-C0B55-36-H

实测配光/OPTICAL RESULTS (PMMA)


LED:Bridgelux LES 9MM
半角 (50%) /FWHM:32.2°
全角 (10%) /FWTM:47.7°
光效/Efficiency:92.71%
眩光值/UGR:5.9
灯光颜色/Light colour: 白色/White



LED:Bridgelux LES 12MM
半角 (50%) /FWHM:34.3°
全角 (10%) /FWTM:52.3°
光效/Efficiency:95.88%
眩光值/UGR:6.3
灯光颜色/Light colour: 白色/White




I LENS144-COB55-36-H320M-218M

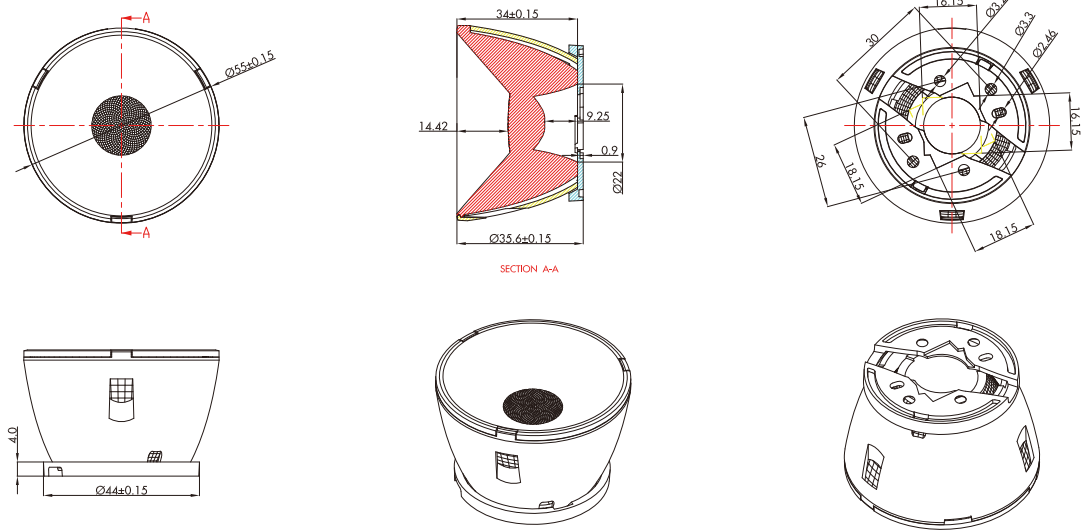

*Holder matched leds/ 支架匹配光源:
CREE: 15xx/18xx Bridgelux : V10-Gen6/V13-Gen6


GENERAL TOL ERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M(除非另有说明)	MATERIAL 材质	PMMA/PC	注意/NOTE: 1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。 The surface of the lens should be smooth without scratches, bubbles, dents and black spots.	
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	

I LENS144-COB55-36-H

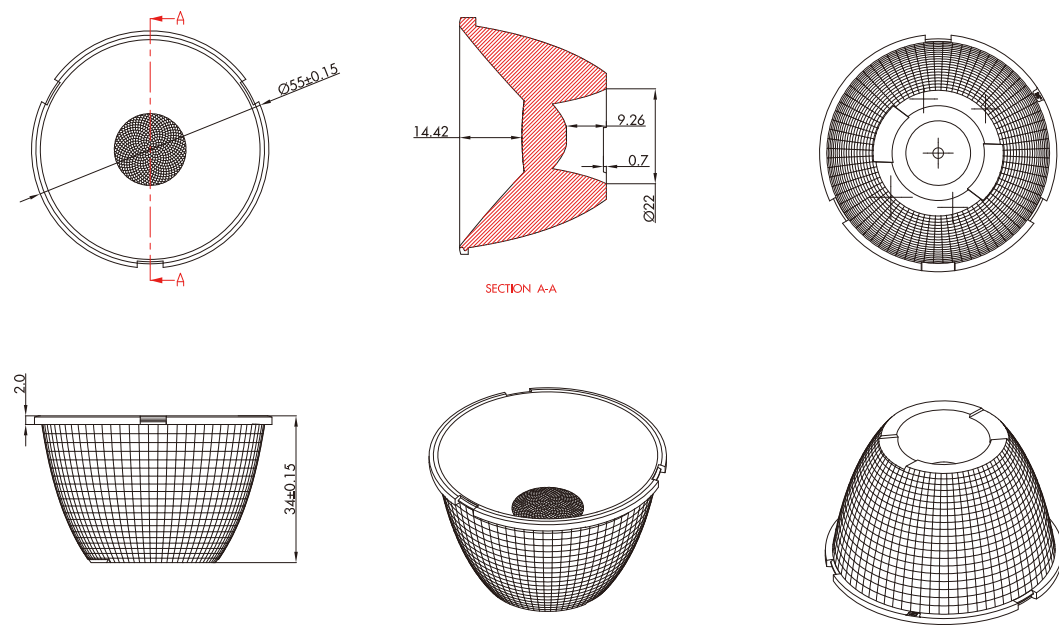


GENERAL TOL ERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M(除非另有说明)	MATERIAL 材质	PMMA	注意/NOTE: 1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。 The surface of the lens should be smooth without scratches, bubbles, dents and black spots.	
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	

H320M

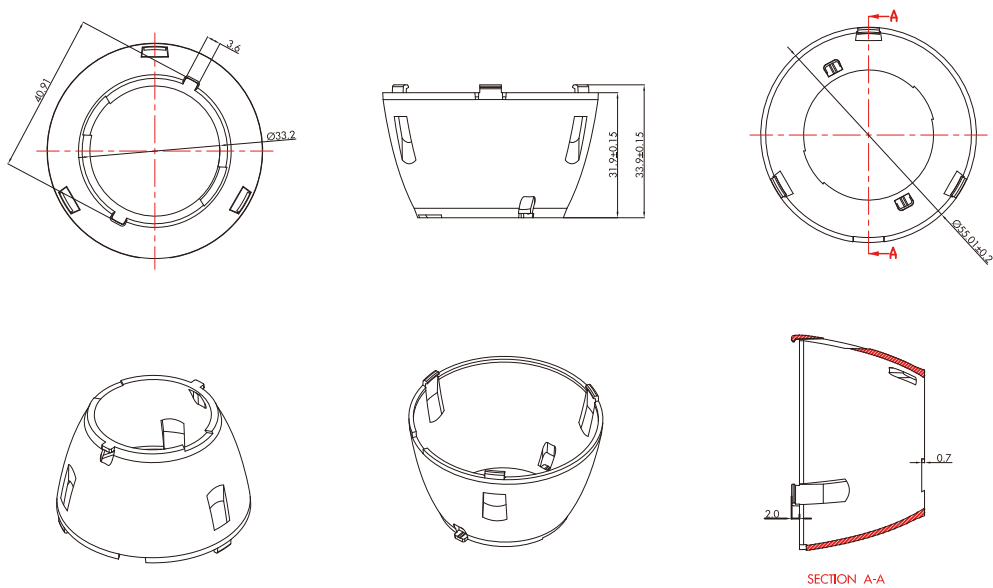

GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC	/	
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°


H218M

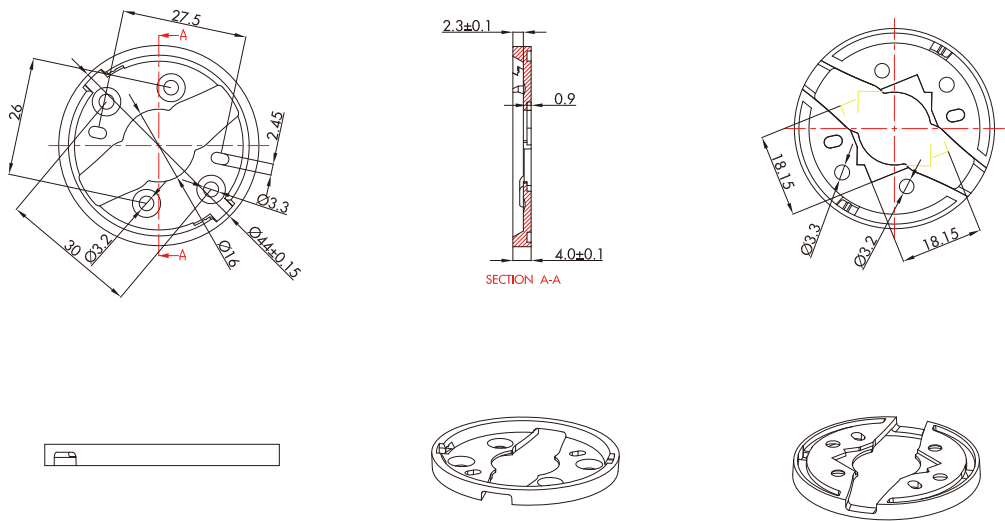

*Holder matched leds/支架匹配光源:
CREE: 13xx/18xx Bridgelux : V10-Gen6/V13-Gen6

GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC	/	
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°


H320-D

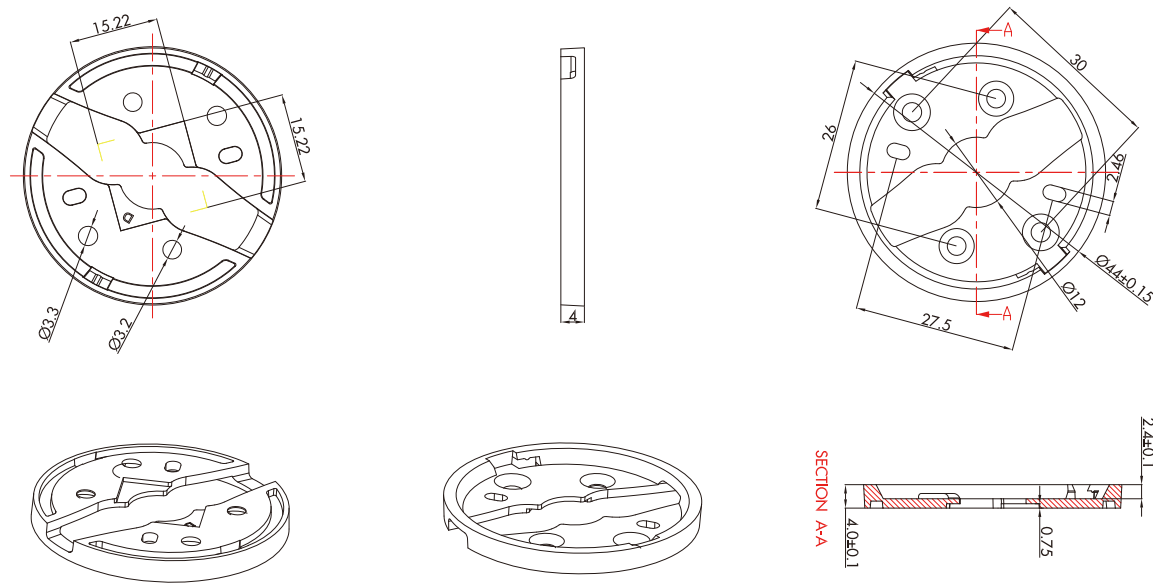

*Holder matched leds/ 支架匹配光源:
Luminus:CHM-9

GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC	/	
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	


H218M-E

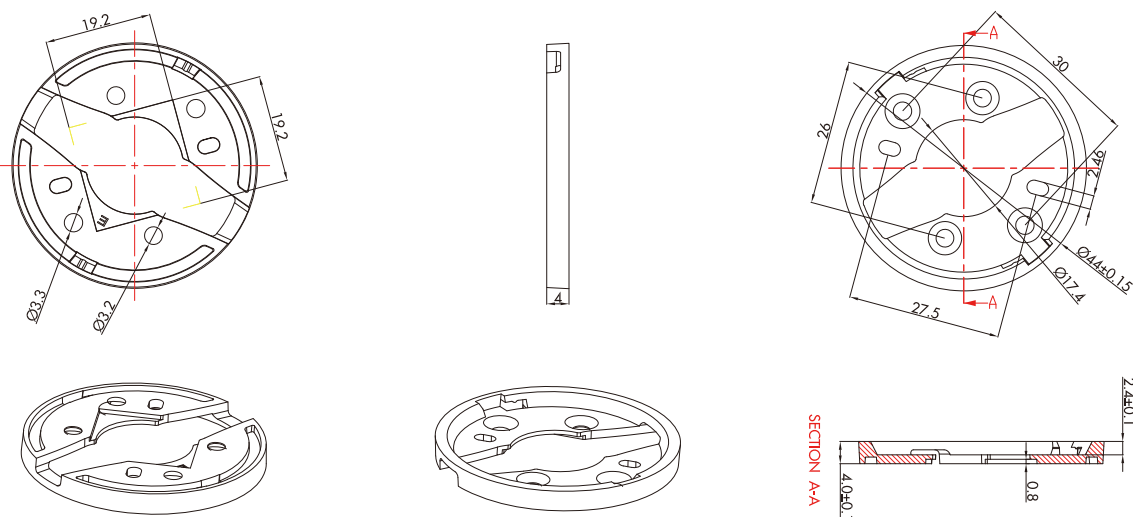

*Holder matched leds/ 支架匹配光源:
CITIZEN:CLU713/CLU723CLU038/CLU030
Bridgelux:V9 HD/V11 HD/V13-G7
Luminus:CXM-11/CXM-14

GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC	/	
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	

Part NO.	QTY
ILENS144-C0B55-36-H	220pcs
吸塑/Blister-380*300	11pcs
外盒/Cardboard Box-395*312*395	1pcs

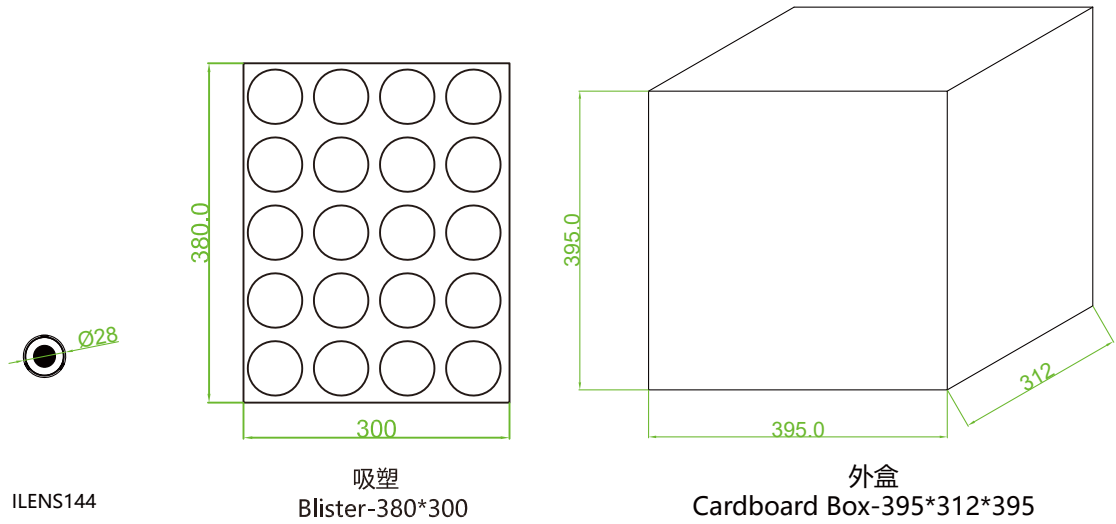

示意图/The schematic diagram:

