


规格/TECHNICAL SPECIFICATIONS


型号/MODEL NUMBER:	ILENS146-C0B75-50-H
透镜尺寸/LENS DIMENSIONS:	Φ75.0*46.0MM
支架尺寸/HOLDER DIMENSIONS:	Φ75.0*48.55MM
定位方式/FASTENING:	锁螺丝/Screw
是否符合ROHS/ROHS COMPLIANT:	是/YES



H318M1

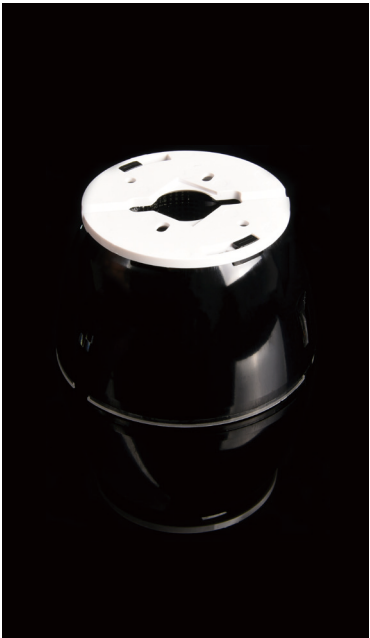

H318M1

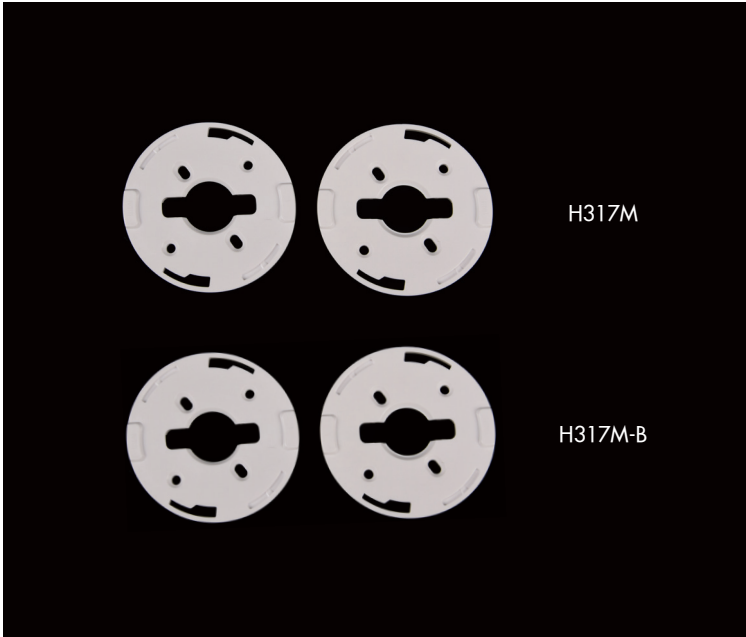

H317M

H317M-B

Holder Part No./支架零件号	Colour /颜色	Specification/规格	Matched led/匹配光源	Fastening/固定
H316M	Black/黑色		/	Clips 卡扣
H317M	White/白色		*Holder matched leds/支架匹配光源: CREE: 1816/1820/1830	Screw 锁螺丝
H317M-B	White/白色		*Holder matched leds/支架匹配光源: Luminus CXM-11 19*19	Screw 锁螺丝


说明/CHARACTERISTIC:

1. 透镜有多种不同的配光角度。
The lens have multiple types beam angles.
2. 不同的支架来匹配不同LED, 锁螺丝定位安装。
With different types brackets to match different leds, Screw positioning.
3. 兼容多种灯珠。
Compatible with various led beads.
4. 适用于室内照明。
Suitable for indoor lighting.
5. 与市面上同类镜头相比, 光效更好, 光斑更漂亮, 兼容性更好, 特别是非常低的炫光值。
Compared with similar type lenses on the market,with higher efficiency,more beautiful spot and better compatibility.
Anti-glare lens with very low UGR


I LENS146-COB75-50-H

实测配光/OPTICAL RESULTS (PMMA)

LED:Bridgelux LES 14MM
 半角 (50%) /FWHM:49.4°
 全角 (10%) /FWTM:65.7°
 光效/Efficiency:101.68%
 眩光值/UGR:13.6
 灯光颜色/Light colour: 白色/White




I LENS146-COB75-50-H316M-317M

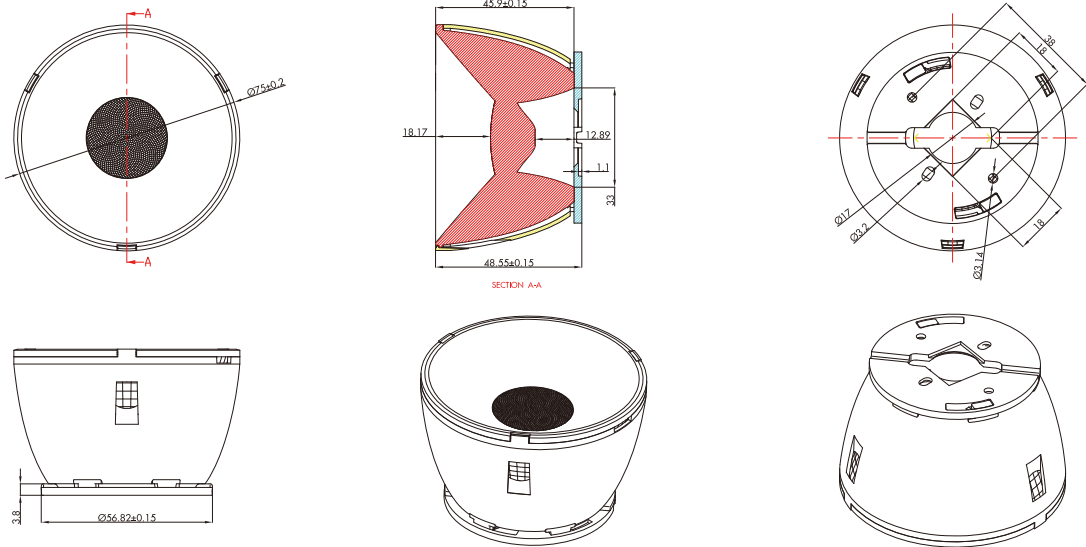

*Holder matched leds/支架匹配光源:
CREE: 1816/1820/1830


GENERAL TOL ERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M(除非另有说明)	MATERIAL 材质	PMMA/PC	注意/NOTE: 1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。 The surface of the lens should be smooth without scratches, bubbles, dents and black spots.	
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	

ILENS146-COB75-50-H

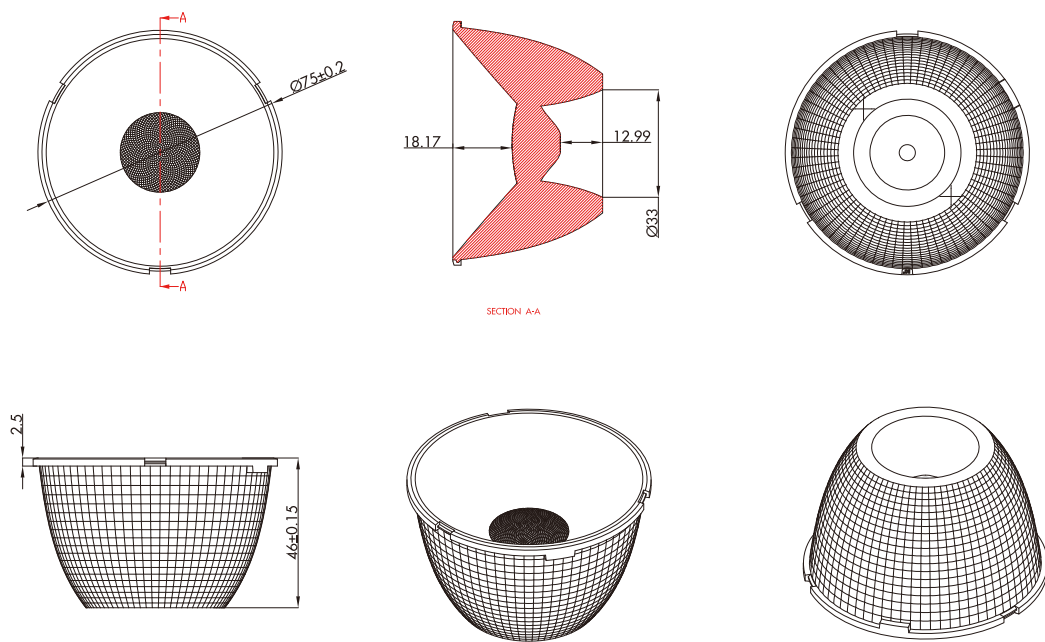


GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PMMA	注意/NOTE: 1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。 The surface of the lens should be smooth without scratches, bubbles, dents and black spots.	
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	

H316M

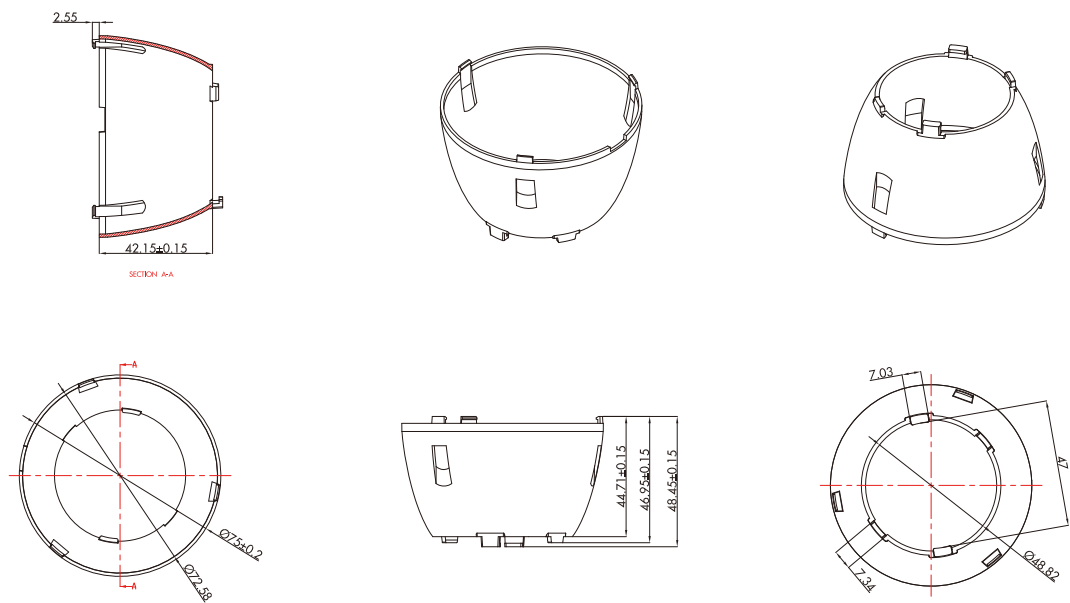

GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC		
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	


H317M

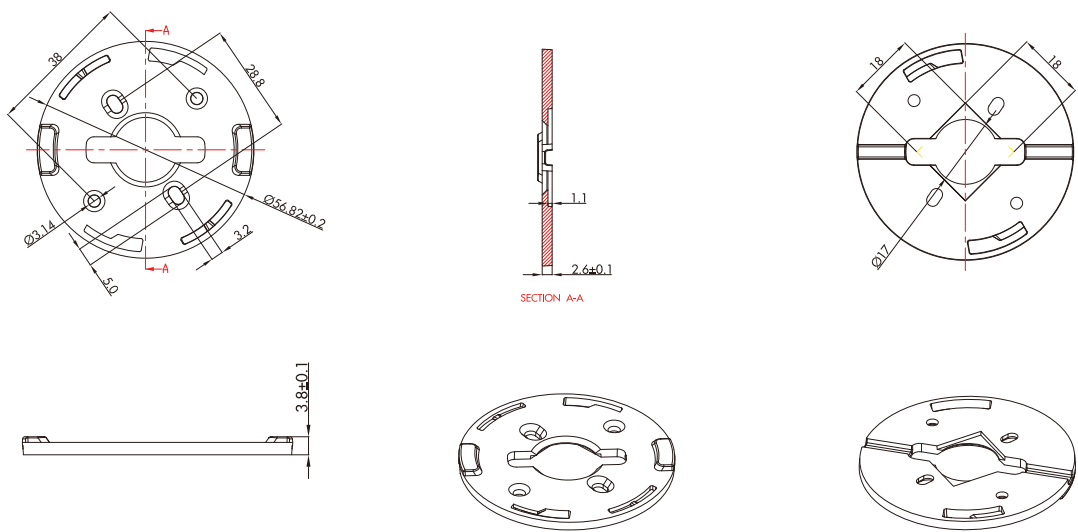

*Holder matched leds/支架匹配光源:
CREE: 1816/1820/1830

GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M(除非另有说明)	MATERIAL 材质	PC	/	
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°

H317M-B

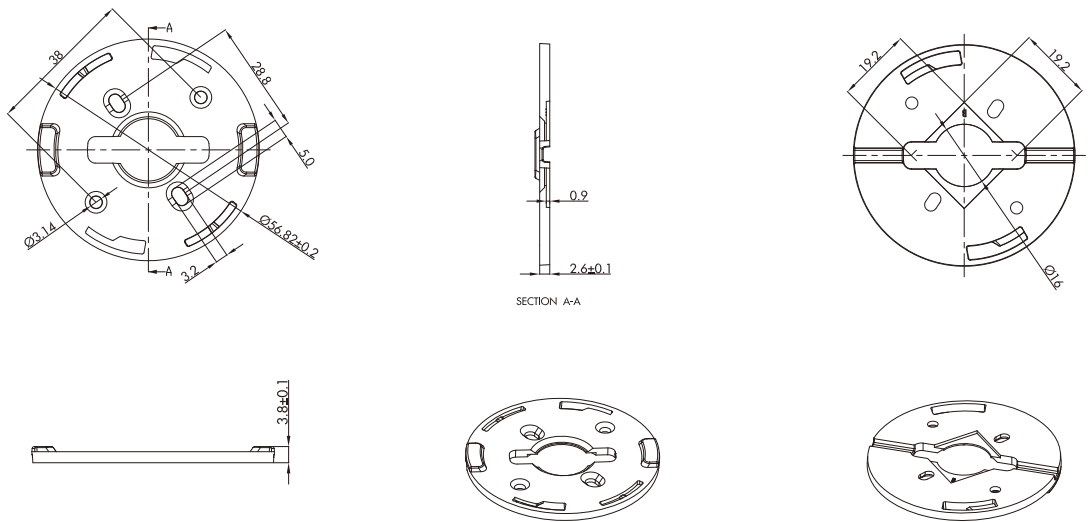


*Holder matched leds/支架匹配光源:
Luminus CXM-11 19*19

GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M(除非另有说明)	MATERIAL 材质	PC	/	
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°


产品包装/Products Packaging

Part NO.	QTY
ILENS146-C0B75-50-H	72pcs
吸塑/Blister-380*300	6pcs
外盒/Cardboard Box-395*312*395	1pcs

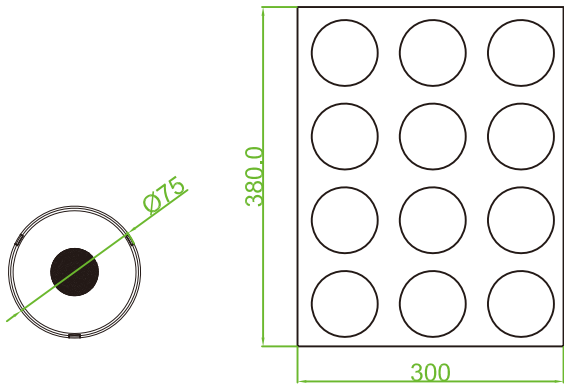


ILENS146

吸塑
Blister-380*300

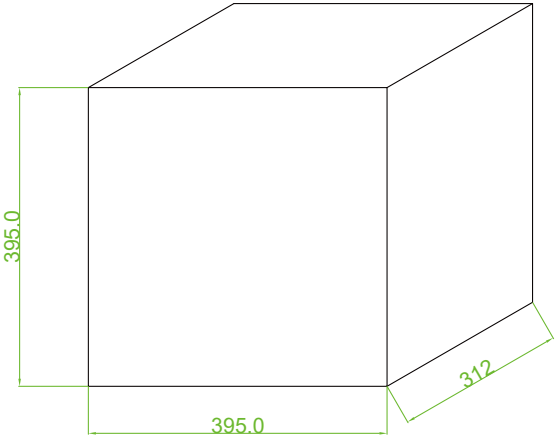


外盒
Cardboard Box-395*312*395

示意图/The schematic diagram:

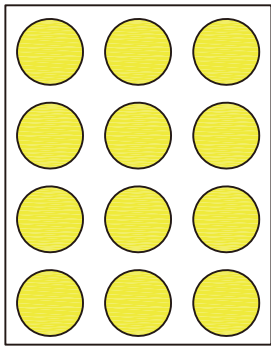

3pcs*4=12pcs

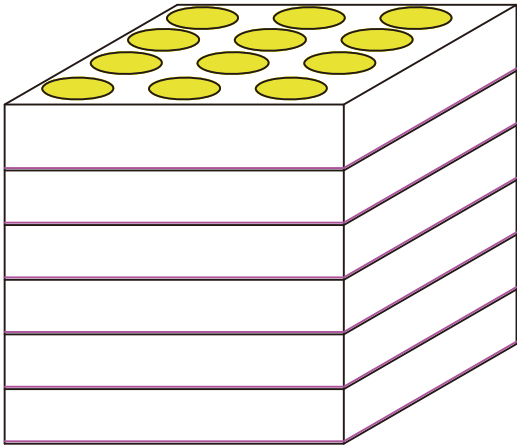

12pcs*6=72pcs