

规格/TECHNICAL SPECIFICATIONS

型号/MODEL NUMBER:	I LENS666-S30-M45-1-H
透镜尺寸/LENS DIMENSIONS:	Φ30.1*14.8MM
支架尺寸/HOLDER DIMENSIONS:	Φ32.0*16.2MM
定位方式/FASTENING:	打胶/贴胶/定位柱/Glue or Tape or Pin
是否符合ROHS/ROHS COMPLIANT:	是/YES



Holder Part No./支架零件号	Colour /颜色	Specification/规格	Function/功能	Fastening/固定
H666V1-3535	Black/黑色		Adapting 3535 LED 适配 3535 LED	Glue/Tape 打胶/贴胶
H666V2-3535	White/白色			
H666V1-5050	Black/黑色		Adapting 5050 LED 适配 5050 LED	
H666V2-5050	White/白色			
H666V1-P	Black/黑色		Adapting 3535 or 5050 or 7070 LED 适配 3535 或 5050 或 7070 LED	PIN 定位柱
H666V2-P	White/白色			

说明/CHARACTERISTIC:

- 透镜有多种不同的配光角度。
The lens have multiple types beam angles.
- 不同的支架匹配不同LED, 贴胶或者定位柱定位安装。
with different type brackets to match different leds, glue or tape or pins for fixed on pcb.
- 兼容多种灯珠。
Compatible with various lamp beads.
- 适用于洗墙灯和投光灯。
Suitable for wall washing lighting and floodlights.
- 与市面上同类镜头相比, 光效更好, 光斑更漂亮, 兼容性更好。
Compared with similar type lenses on the market, with better light effect, more beautiful spot and better compatibility.

LED:CREE XPE2

角度/FWHM:47.3°


光效/Efficiency:95%

峰值强度/Peakintensity:1.68CD/LM

光学面数量/LED/each optic:1

灯光颜色/Light colour:白色/White

所需组件/Required components:

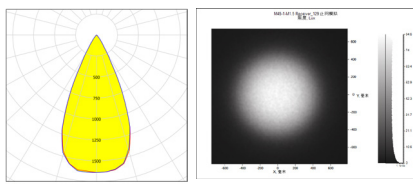

LED:CREE XML2

角度/FWHM:48.3°


光效/Efficiency:95%

峰值强度/Peakintensity:1.58CD/LM

光学面数量/LED/each optic:1

灯光颜色/Light colour:白色/White

所需组件/Required components:

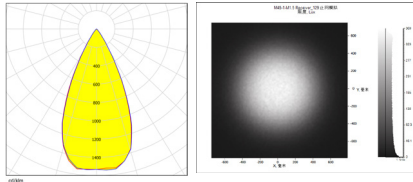

LED:CREE XHP50.2

角度/FWHM:47.8°


光效/Efficiency:95%

峰值强度/Peakintensity:1.52CD/LM

光学面数量/LED/each optic:1

灯光颜色/Light colour:白色/White

所需组件/Required components:

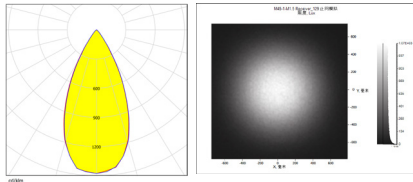

LED:CREE XHP70.2

角度/FWHM:47.4°


光效/Efficiency:95%

峰值强度/Peakintensity:1.51CD/LM

光学面数量/LED/each optic:1

灯光颜色/Light colour:白色/White

所需组件/Required components:

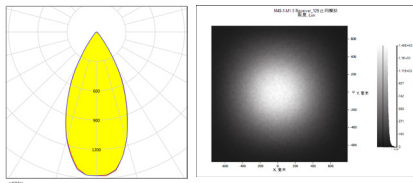

LED:SEOUL STWOL8PA

角度/FWHM:44°


光效/Efficiency:95%

峰值强度/Peakintensity:1.85CD/LM

光学面数量/LED/each optic:1

灯光颜色/Light colour:白色/White

所需组件/Required components:

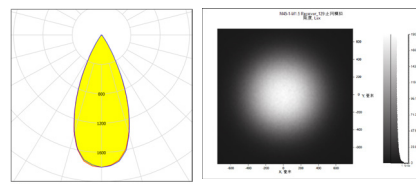

LED:LUXEON 5050 Round

角度/FWHM:45.8°


光效/Efficiency:95%

峰值强度/Peakintensity:1.73CD/LM

光学面数量/LED/each optic:1

灯光颜色/Light colour:白色/White

所需组件/Required components:

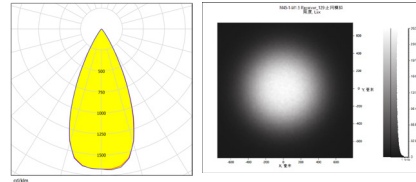

LED:LUXEON 5050 Square

角度/FWHM:46.1°


光效/Efficiency:95%

峰值强度/Peakintensity:1.72CD/LM

光学面数量/LED/each optic:1

灯光颜色/Light colour:白色/White

所需组件/Required components:

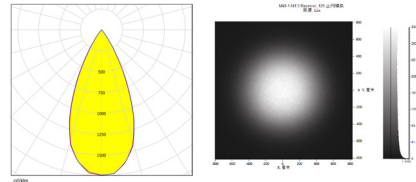

LED:OSRAM GW-P9LR35pm

角度/FWHM:49.9°


光效/Efficiency:95%

峰值强度/Peakintensity:1.47CD/LM



光学面数量/LED/each optic:1

灯光颜色/Light colour:白色/White





所需组件/Required components:

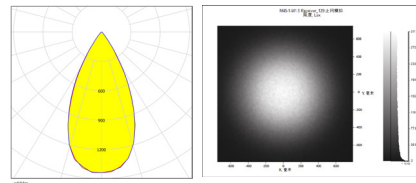

CAD



SECTION A-A




注意/NOTE:

1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。

The surface of the lens should be smooth without scratches, bubbles, dents and black spots.


GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PMMA	DRAWING TITLE 绘图标题	ILENS666-S30-M45-1-H
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°

H666V1-3535/H666V2-3535

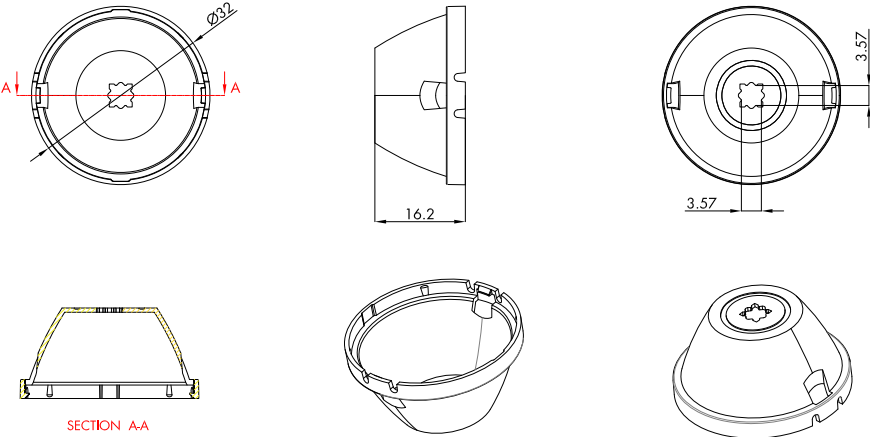


材质/MATERIAL	PC
线性/LINEAR	
0~5±0.05	
5~10±0.1	
10~30±0.15	
角度/ANGULAR	
0°~10°±1°	
10°~50°±0.5°	
50°~120°±0.3°	

H666V1-5050/H666V2-5050

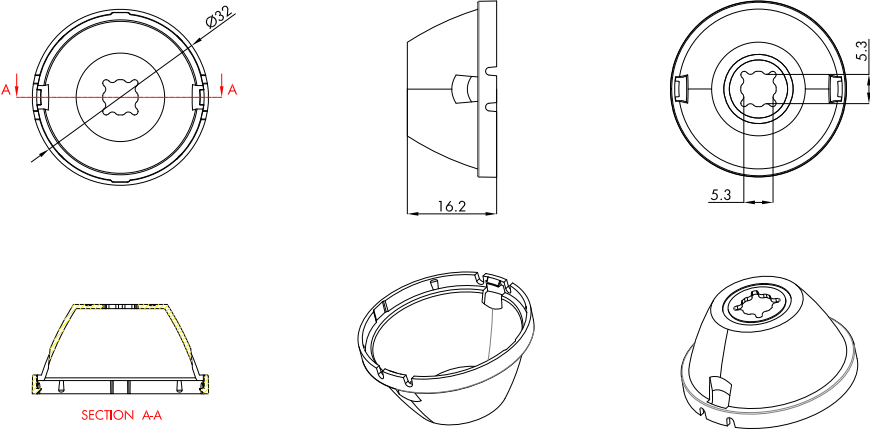


材质/MATERIAL	PC
线性/LINEAR	
0~5±0.05	
5~10±0.1	
10~30±0.15	
角度/ANGULAR	
0°~10°±1°	
10°~50°±0.5°	
50°~120°±0.3°	

H666V1-P/H666V2-P

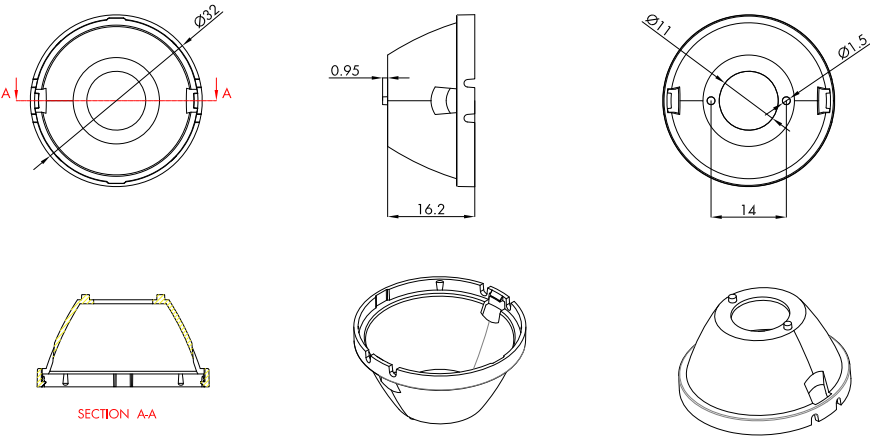


材质/MATERIAL	PC
线性/LINEAR	
0~5±0.05	
5~10±0.1	
10~30±0.15	
角度/ANGULAR	
0°~10°±1°	
10°~50°±0.5°	
50°~120°±0.3°	

产品包装/Products Packaging

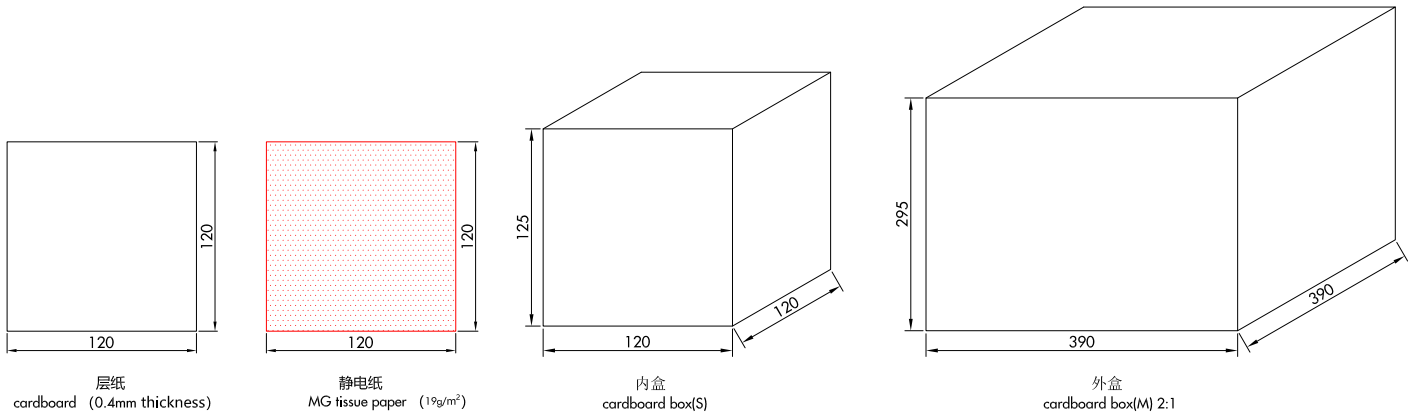

型号/Part No.	数量/QTY
ILENS666-S30-M45-1-H666V1-P/H666V2-P	2016pcs
静电纸/MG tissue paper (19g/m ²)	14pcs
层纸/cardboard (0.4mm thickness)	86pcs
内盒/cardboard box (S)	18pcs
外盒/cardboard box (M)	1pcs

示意图/The schematic diagram:

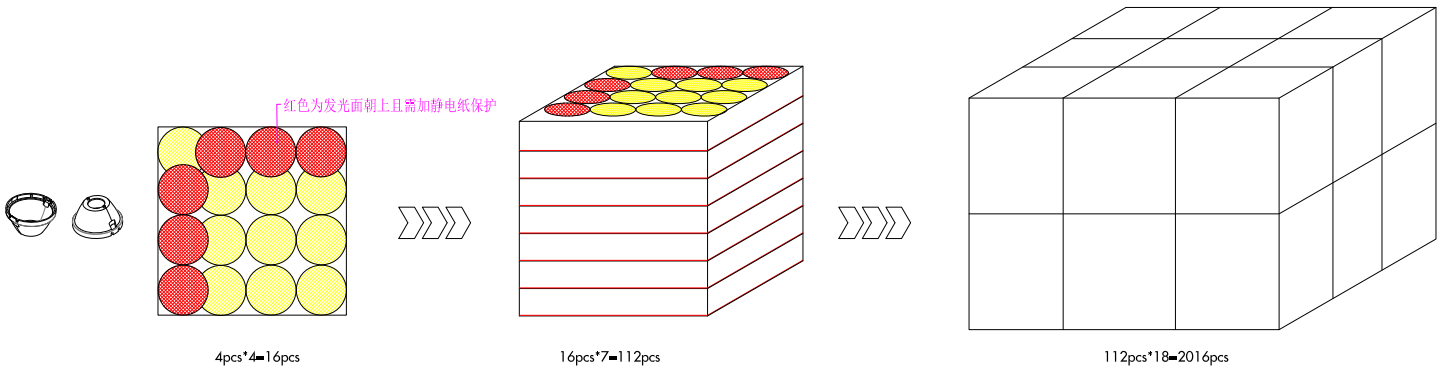

型号/Part No.	数量/QTY
ILENS666-S30-M45-1-H666V1-3535 (5050) /H666V2-3535 (5050)	2016pcs
静电纸/MG tissue paper (19g/m ²)	14pcs
层纸/cardboard (0.4mm thickness)	8pcs
内盒/cardboard box (S)	18pcs
外盒/cardboard box (M)	1pcs

示意图/The schematic diagram:

