

规格/TECHNICAL SPECIFICATIONS

型号/MODEL NUMBER:	I LENS222-S35-M60-H
透镜尺寸/LENS DIMENSIONS:	Φ35*17.50MM
支架尺寸/HOLDER DIMENSIONS:	Φ37*18.84MM
定位方式/FASTENING:	打胶/贴胶/定位柱/Type or Pin
是否符合ROHS/ROHS COMPLIANT:	是/YES




Holder Part No./支架零件号	Colour /颜色	Specification/规格	Function/功能	Fastening/固定
H222V-3535	Black/黑色		Adapting 3535 LED 适配 3535 LED	Type 打胶/贴胶
	White/白色			
H222V-5050	Black/黑色		Adapting 5050 LED 适配 5050 LED	
	White/白色			
H222V-P	Black/黑色		Adapting 3535 or 5050 or 7070 LED 适配 3535 或 5050 或 7070 LED	PIN 定位柱
	White/白色			
H222V-P-1	Black/黑色		Adapting 3535 or 5050 LED 适配 3535 或 5050 LED	PIN 定位柱
	White/白色			


说明/CHARACTERISTIC:

- 透镜有多种不同的配光角度。
The lens have multiple types beam angles.
- 多种不同的支架来匹配不同LED, 贴胶或者定位柱定位安装。
With different types of holders to match different leds, Self-adhesive tape or pins for fix.
- 兼容多种灯珠。
Compatible with various lamp beads.
- 适用于洗墙灯和投光灯。
Suitable for wall washing lighting and floodlights.
- 与市面上同类镜头相比, 光效更好, 光斑更漂亮, 兼容性更好。
Compared with similar type lenses on the market,with better light effect ,more beautiful spot and better compatibility.


LED:CREE XPE2
 角度/FWHM: 59°
 光效/Efficiency: 95%
 峰值强度/Peakintensity: 1.17CD/LM
 光学面数量/LED/each optic: 1
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

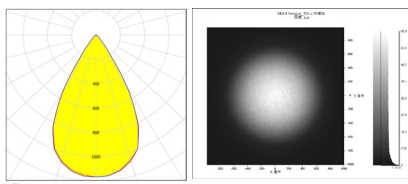


LED:CREE XML2
 角度/FWHM: 58°
 光效/Efficiency: 95%
 峰值强度/Peakintensity: 1.16CD/LM
 光学面数量/LED/each optic: 1
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

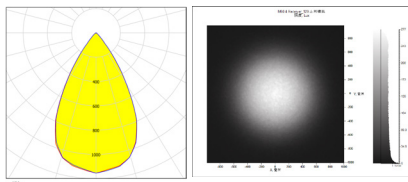


LED:CREE 50.2
 角度/FWHM: 57.3°
 光效/Efficiency: 95%
 峰值强度/Peakintensity: 1.12CD/LM
 光学面数量/LED/each optic: 1
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

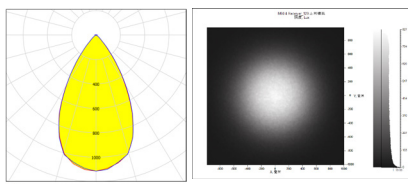


LED:CREE XHP70.2
 角度/FWHM: 57.3°
 光效/Efficiency: 95%
 峰值强度/Peakintensity: 1.07CD/LM
 光学面数量/LED/each optic: 1
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

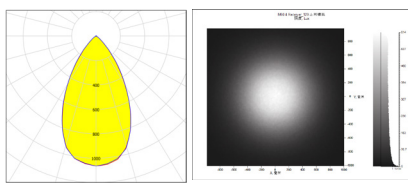


LED:SEOUL STW0L8PA
 角度/FWHM: 55.6°
 光效/Efficiency: 95%
 峰值强度/Peakintensity: 1.25CD/LM
 光学面数量/LED/each optic: 1
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

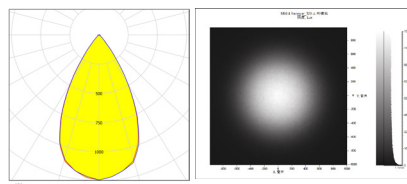


LED:LUXEON 5050 Round
 角度/FWHM: 56.4°
 光效/Efficiency: 95%
 峰值强度/Peakintensity: 1.23CD/LM
 光学面数量/LED/each optic: 1
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

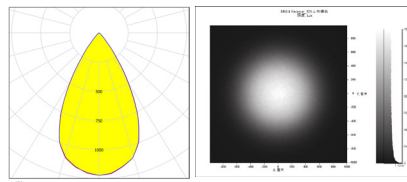



LED:LUXEON 5050 Square
 角度/FWHM: 56.3°
 光效/Efficiency: 95%
 峰值强度/Peakintensity: 1.23CD/LM
 光学面数量/LED/each optic: 1
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

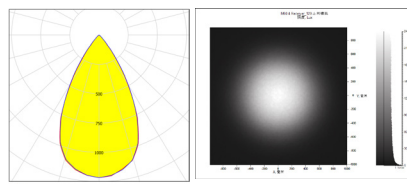





LED:OSRAM GW_P9LR35pm
 角度/FWHM: 57.5°
 光效/Efficiency: 95%
 峰值强度/Peakintensity: 1.13CD/LM
 光学面数量/LED/each optic: 1
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

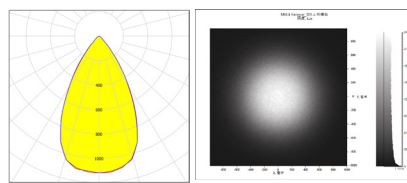

CAD



SECTION A-A




注意/NOTE:

1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。

The surface of the lens should be smooth without scratches, bubbles, dents and black spots.


GENERAL TOL ERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M(除非另有说明)	MATERIL 材质	PMMA	DRAWING TITLE 绘图标题	ILENS222-S35-M60-H
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°

H222V-3535

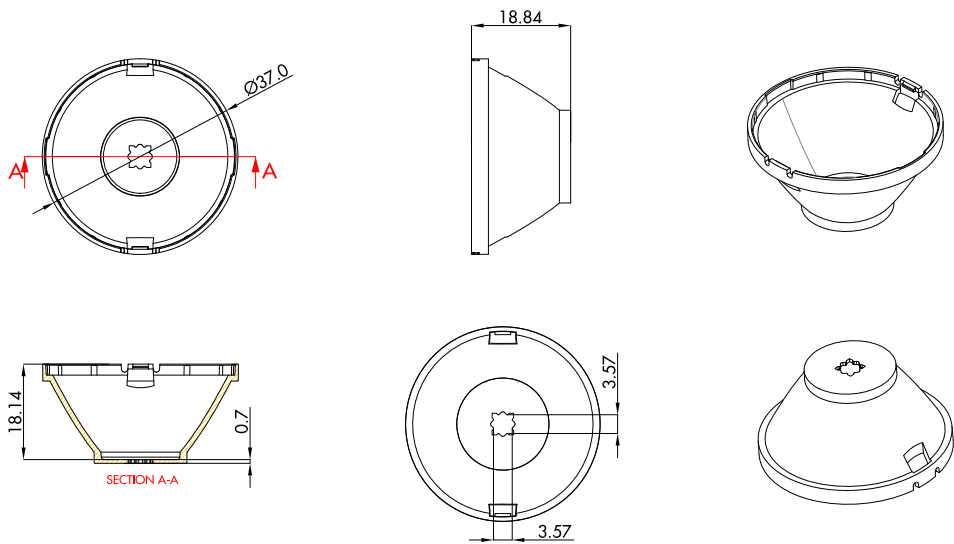


材质/MATERIL	PC
线性/LINEAR	
0~5±0.05	
5~10±0.1	
10~30±0.15	
角度/ANGULAR	
0°~10°±1°	
10°~50°±0.5°	
50°~120°±0.3°	

H222V-5050

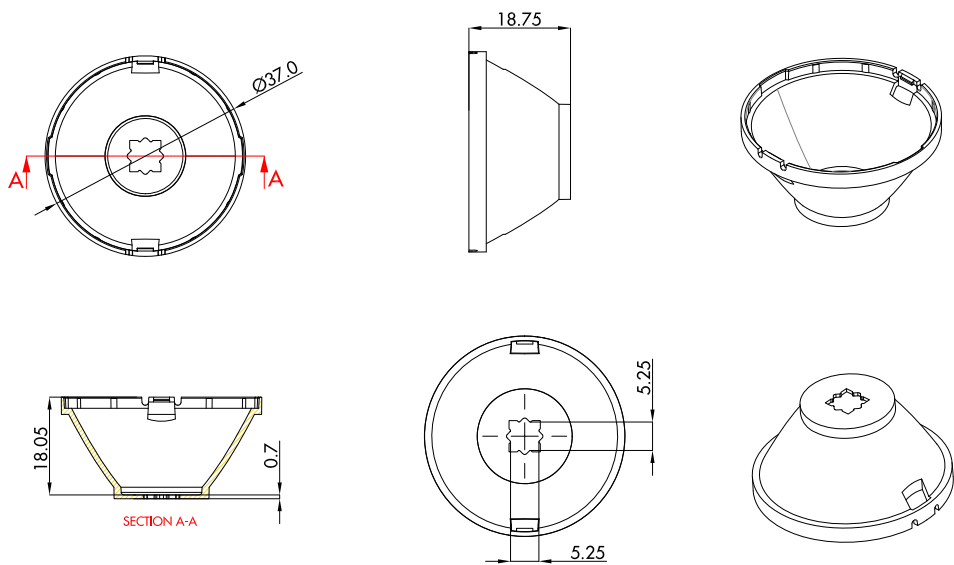


材质/MATERIL	PC
线性/LINEAR	
0~5±0.05	
5~10±0.1	
10~30±0.15	
角度/ANGULAR	
0°~10°±1°	
10°~50°±0.5°	
50°~120°±0.3°	

H222V-P

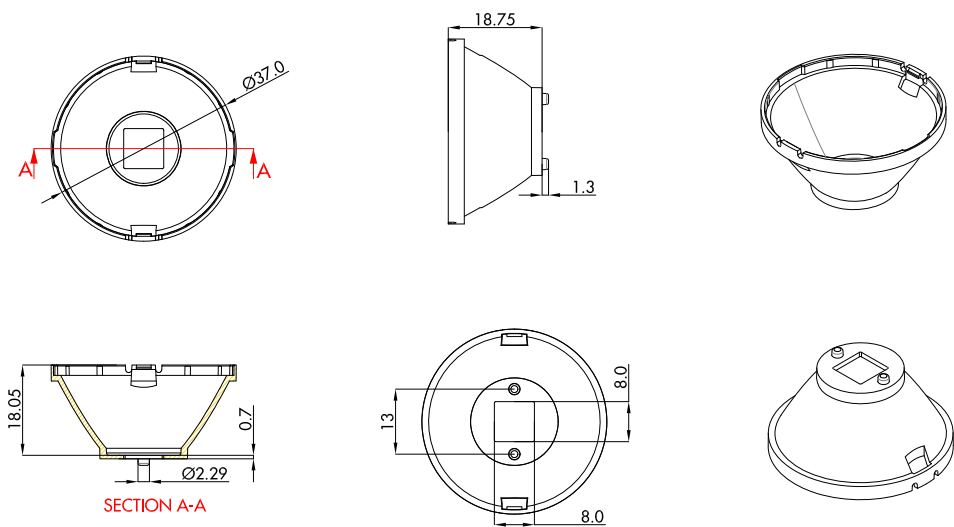


材质/MATERIL	PC
线性/LINEAR	
0~5±0.05	
5~10±0.1	
10~30±0.15	
角度/ANGULAR	
0°~10°±1°	
10°~50°±0.5°	
50°~120°±0.3°	

H222V-P-1

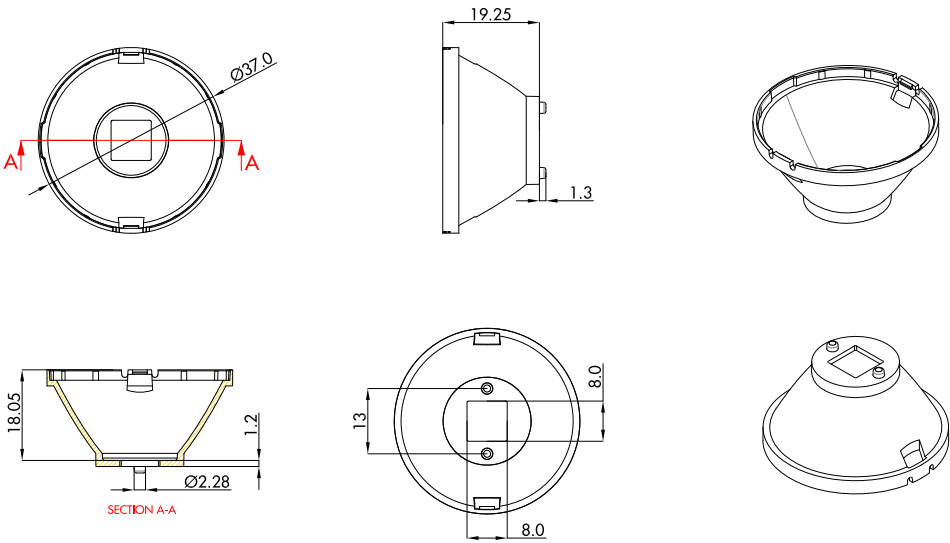


材质/MATERIL	PC
线性/LINEAR	
0~5±0.05	
5~10±0.1	
10~30±0.15	
角度/ANGULAR	
0°~10°±1°	
10°~50°±0.5°	
50°~120°±0.3°	

产品包装/Products Packaging

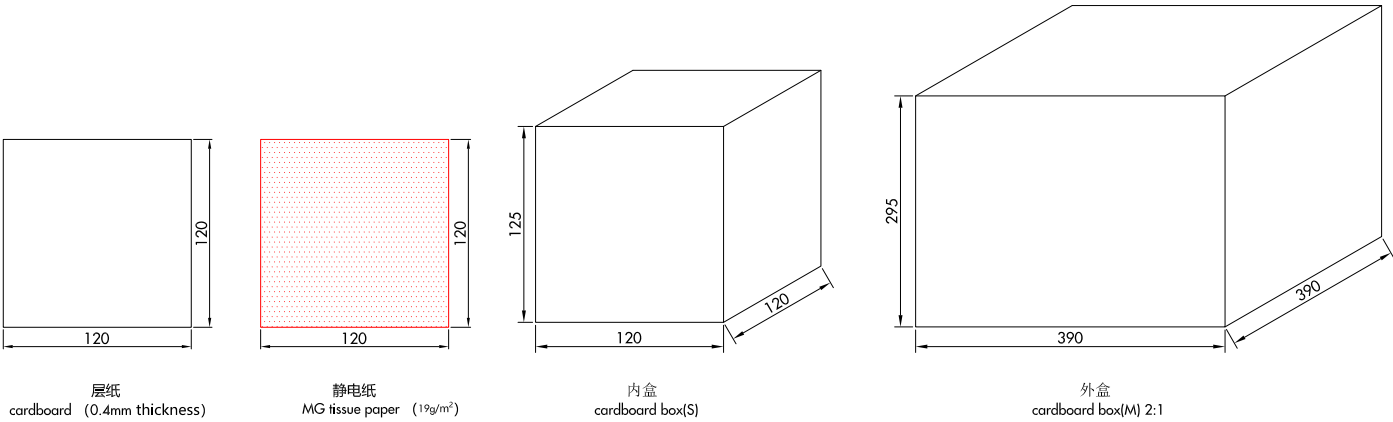

型号/Part No.	数量/QTY
ILENS222-S35-M60-H	1134pcs
精电纸/MG tissue paper (19g/m²)	126pcs
层纸/cardboard (0.4mm thickness)	144pcs
内盒/cardboard box (S)	18pcs
外盒/cardboard box (M)	1pcs

示意图/The schematic diagram:

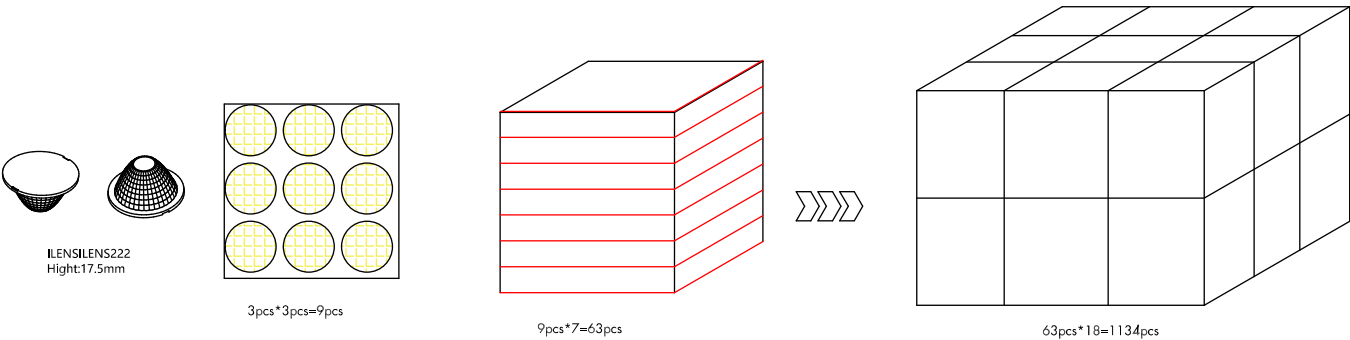

型号/Part No.	数量/QTY
ILENS222-S35-M60-H-H222V-X	972pcs
精电纸/MG tissue paper (19g/m²)	108pcs
层纸/cardboard (0.4mm thickness)	126pcs
内盒/cardboard box (S)	18pcs
外盒/cardboard box (M)	1pcs

示意图/The schematic diagram:

