

规格/TECHNICAL SPECIFICATIONS

型号/MODEL NUMBER:	I LENS999-S20-B30-H
透镜尺寸/LENS DIMENSIONS:	Φ18.0*11.5MM
支架尺寸/HOLDER DIMENSIONS:	Φ20.0*12.7MM
定位方式/FASTENING:	打胶/贴胶/定位柱/Glue or Tape or Pin
是否符合R0HS/ROHS COMPLIANT:	是/YES




Holder Part No./支架零件号	Colour /颜色	Specification/规格	Function/功能	Fastening/固定
H999H1-3030	Black/黑色		Adapting 3030 LED 适配 3030 LED	Glue/Tape 打胶/贴胶
H999H2-3030	White/白色			
H999H1-3535	Black/黑色		Adapting 3535 LED 适配 3535 LED	
H999H2-3535	White/白色			
H999H1-5050	Black/黑色		Adapting 5050 LED 适配 5050 LED	
H999H2-5050	White/白色			
H999H1-P	Black/黑色		Adapting 3030 or 3535 or 5050 LED 适配 3030 或 3535 或 5050 LED	PIN 定位柱
H999H2-P	White/白色			


说明/CHARACTERISTIC:

- 透镜有多种不同的配光角度。
The lens have multiple types beam angles.
- 不同的支架匹配不同LED, 贴胶或者定位柱定位安装。
with different type brackets to match different leds, glue or tape or pins for fixed on pcb.
- 兼容多种灯珠。
Compatible with various lamp beads.
- 适用于洗墙灯和投光灯。
Suitable for wall washing lighting and floodlights.
- 与市面上同类镜头相比, 光效更好, 光斑更漂亮, 兼容性更好。
Compared with similar type lenses on the market,with better light effect ,more beautiful spot and better compatibility.


LED:CREE XPE2
 角度/FWHM:32°
 光效/Efficiency:94%
 峰值强度/Peakintensity:2.98CD/LM
 光学面数量/LED/each optic:1
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

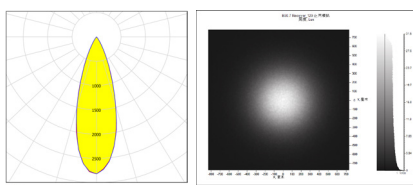


LED:CREE XPG2
 角度/FWHM:33.4°
 光效/Efficiency:94%
 峰值强度/Peakintensity:2.74CD/LM
 光学面数量/LED/each optic:1
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

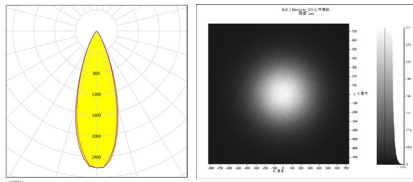


LED:CREE JR5050C
 角度/FWHM:36.6°
 光效/Efficiency:94%
 峰值强度/Peakintensity:2.31CD/LM
 光学面数量/LED/each optic:1
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

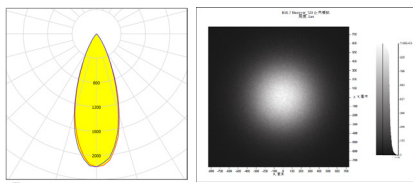


LED:LUXEON 3030 Round
 角度/FWHM:28.9°
 光效/Efficiency:94%
 峰值强度/Peakintensity:3.45CD/LM
 光学面数量/LED/each optic:1
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

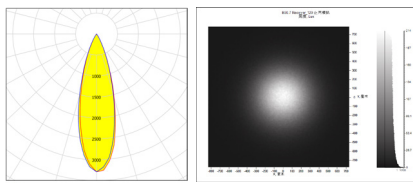


LED:LUXEON 5050 Round
 角度/FWHM:36°
 光效/Efficiency:94%
 峰值强度/Peakintensity:2.38CD/LM
 光学面数量/LED/each optic:1
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

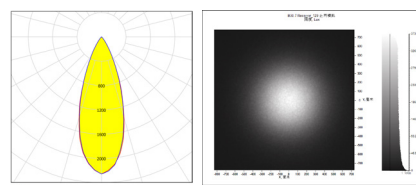


LED:SAMSUNG LH301B
 角度/FWHM:36°
 光效/Efficiency:94%
 峰值强度/Peakintensity:2.51CD/LM
 光学面数量/LED/each optic:1
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

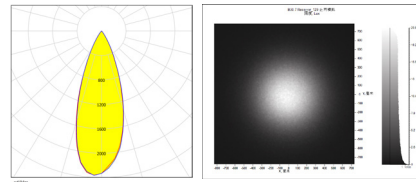


LED:SAMSUNG LM281A
 角度/FWHM:29.2°
 光效/Efficiency:94%
 峰值强度/Peakintensity:3.4CD/LM
 光学面数量/LED/each optic:1
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

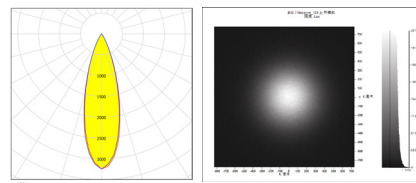

LED:SEOUL MJT3030
 角度/FWHM:29.1°
 光效/Efficiency:94%
 峰值强度/Peakintensity:3.51CD/LM
 光学面数量/LED/each optic:1
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

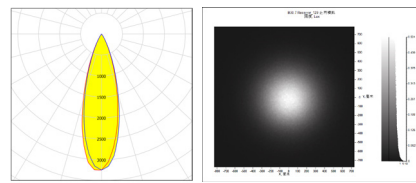

CAD

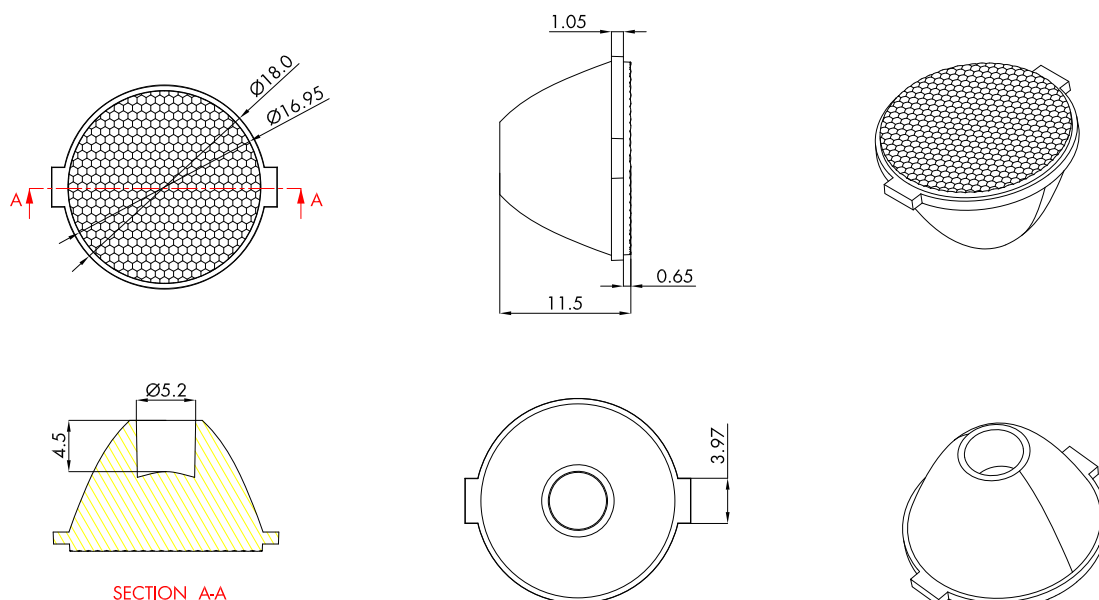


注意/NOTE:

1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。

The surface of the lens should be smooth without scratches, bubbles, dents and black spots.


GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PMMA	DRAWING TITLE 绘图标题	ILENS999-S20-B30-H
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°

H999H1-3030/H999H2-3030

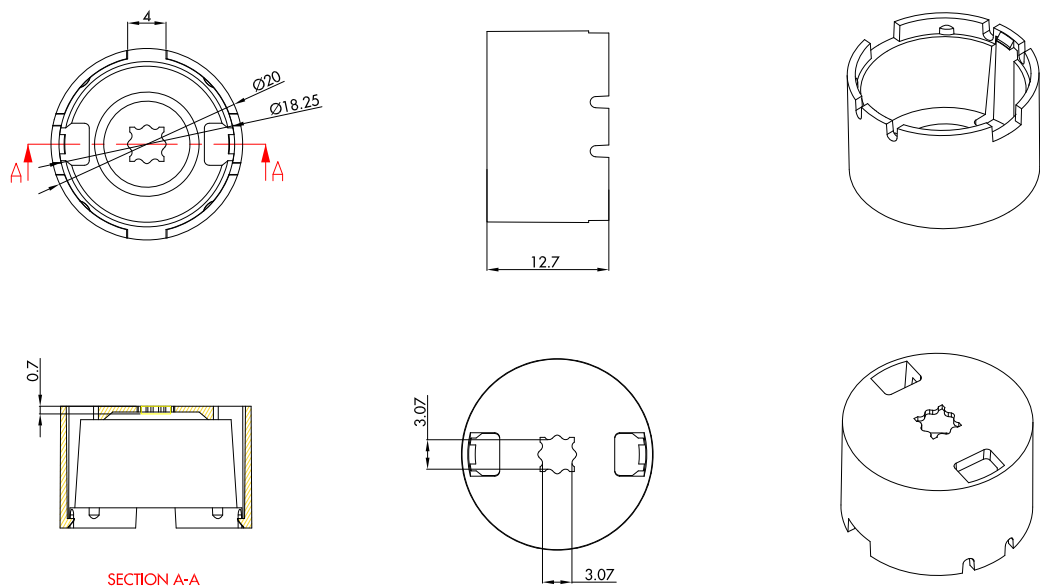


GENERAL TOL ERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC	DRAWING TITLE 绘图标题	/
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°

H999H1-3535/H999H2-3535

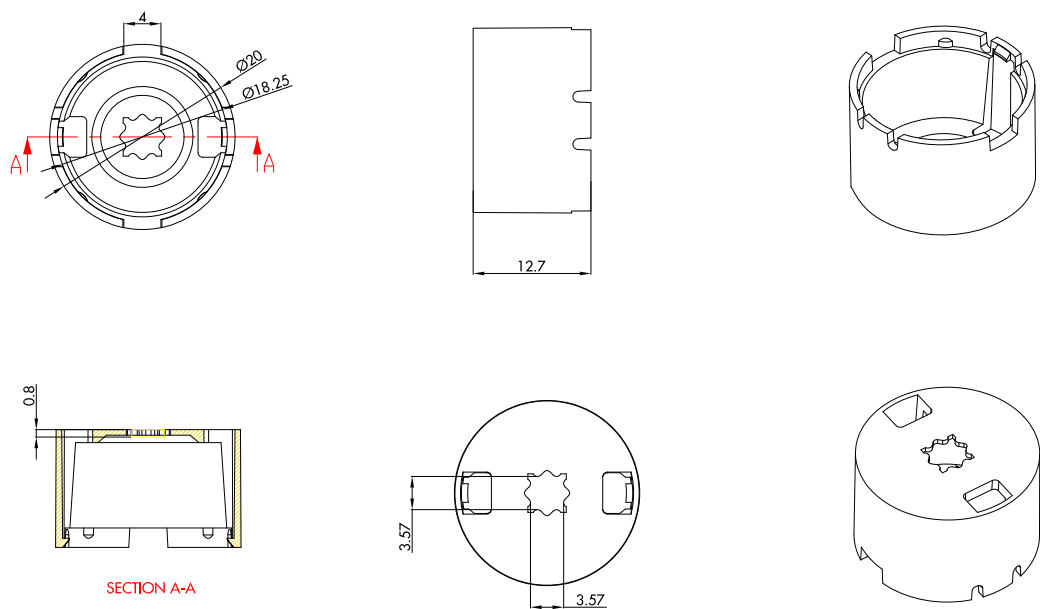


GENERAL TOL ERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC	DRAWING TITLE 绘图标题	/
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°

H999H1-5050/H999H2-5050

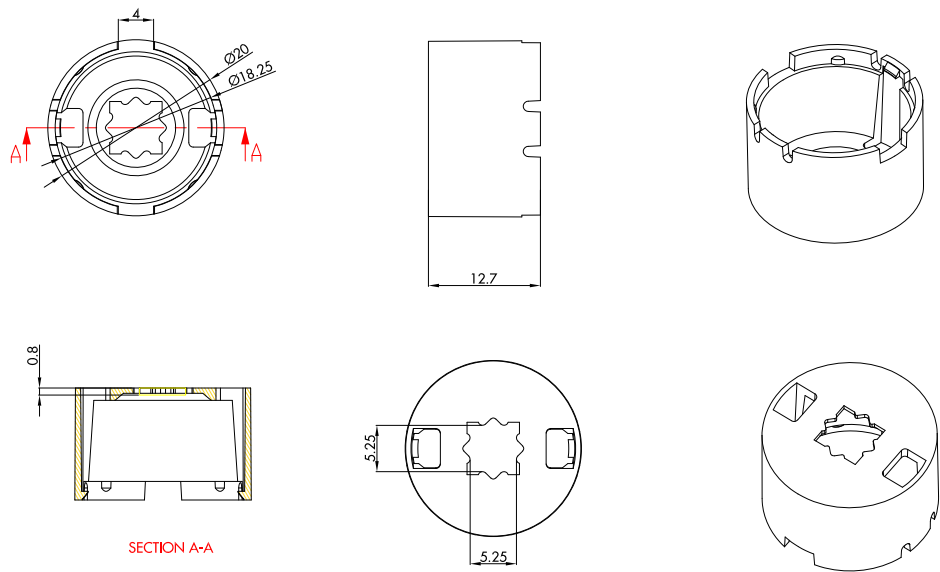


GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC	DRAWING TITLE 绘图标题	/
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	

H999H1-P/H999H2-P

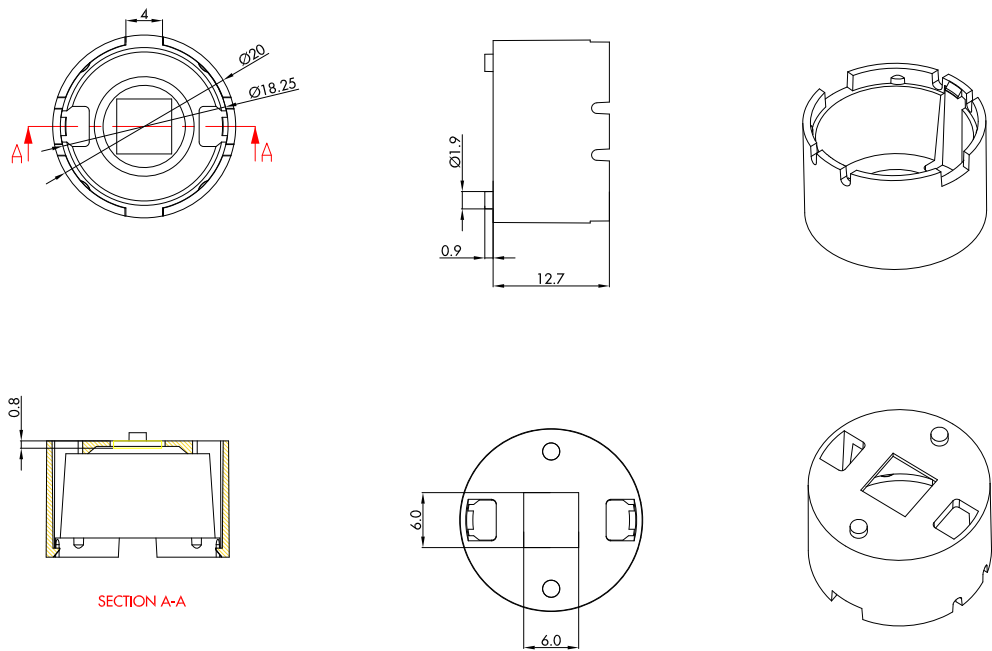


GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIAL 材质	PC	DRAWING TITLE 绘图标题	/
LINEAR/线性	0~5±0.05	5~10±0.1	10~30±0.15	
ANGULAR/角度	0°~10°±1°	10°~50°±0.5°	50°~120°±0.3°	

产品包装/Products Packaging

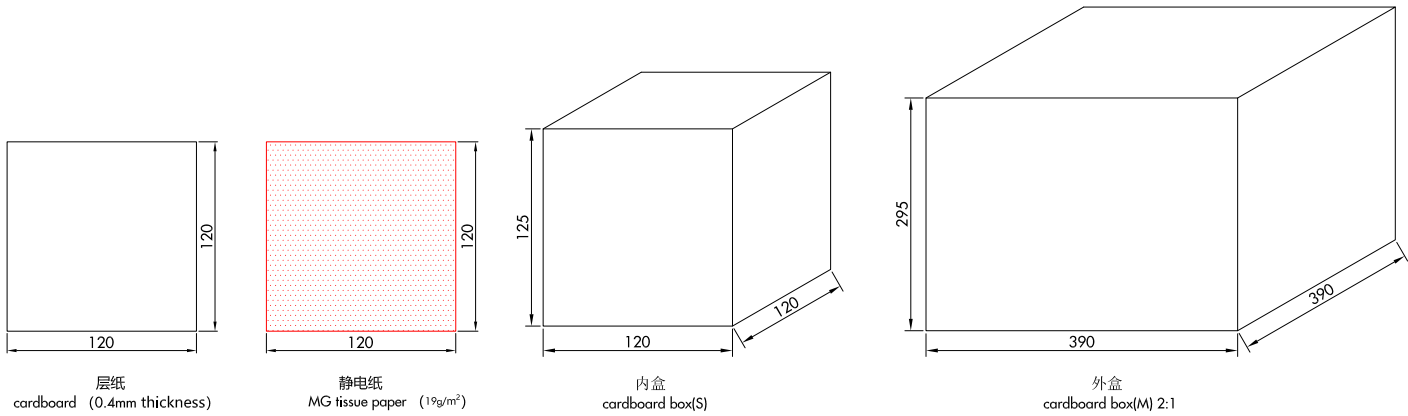

型号/Part No.	数量/QTY
ILENS999-S20-B30-H	6480pcs
静电纸/MG tissue paper (19g/m ²)	180pcs
层纸/cardboard (0.4mm thickness)	180pcs
内盒/cardboard box (S)	18pcs
外盒/cardboard box (M)	1pcs

示意图/The schematic diagram:

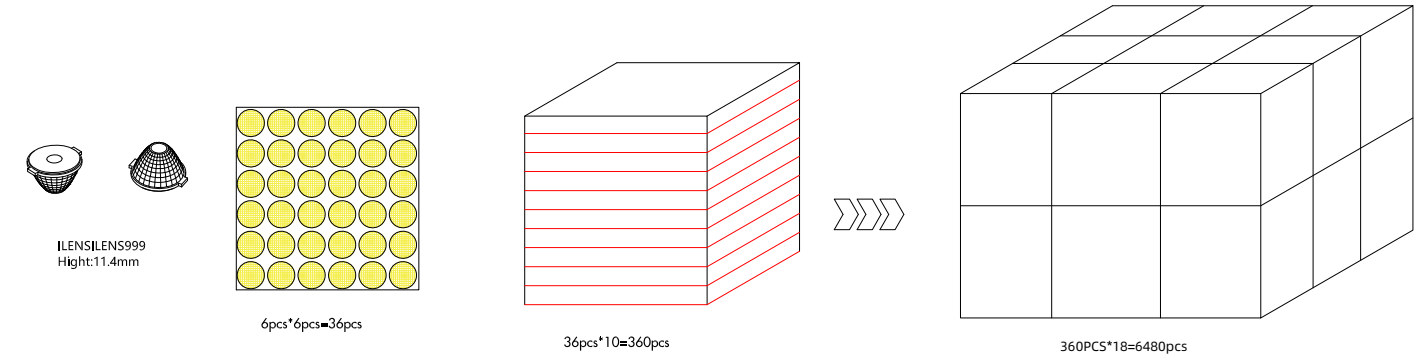

型号/Part No.	数量/QTY
ILENS999-S20-XX-H-H999HX-XXXX	6480pcs
静电纸/MG tissue paper (19g/m ²)	180pcs
层纸/cardboard (0.4mm thickness)	180pcs
内盒/cardboard box (S)	18pcs
外盒/cardboard box (M)	1pcs

示意图/The schematic diagram:

