

规格/TECHNICAL SPECIFICATIONS

型号/MODEL NUMBER:

I LENS770-R5050-90T-6H1-NH

透镜尺寸/LENS DIMENSIONS:

49.5*49.5*7.0MM

定位方式/FASTENING:

锁螺丝、定位柱/Screw or Pin

是否符合ROHS/ROHS COMPLIANT:


是/YES




说明/CHARACTERISTIC:

1. 多种不同配光角度的镜片。
A variety of lenses with different beam angles
2. 一体化镜头无支架。
The integrated lens has no holder.
3. 兼容多种灯珠。
Compatible with various LEDs.
4. 适用于球场灯、投光灯。
Suitable for Stadium light, flood light.


LED:SEOUL STW0L8PA
 角度/FWHM:57°
 光效/Efficiency:87.5%
 峰值强度/Peakintensity:0.56CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

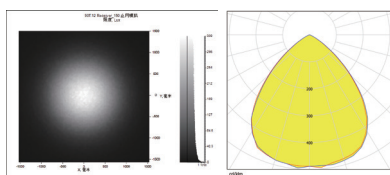


LED:CREE 5050 Square
 角度/FWHM:87°
 光效/Efficiency:89%
 峰值强度/Peakintensity:0.56CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

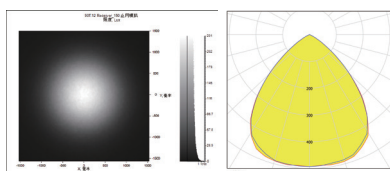


LED:OSRAM GW_P9LR34em
 角度/FWHM:88.6°
 光效/Efficiency:89%
 峰值强度/Peakintensity:0.55CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

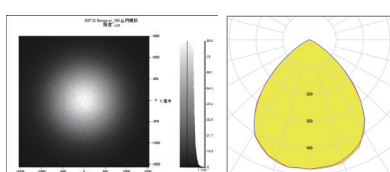


LED:LUXEON 5050 Round
 角度/FWHM:86.7°
 光效/Efficiency:89%
 峰值强度/Peakintensity:0.56CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

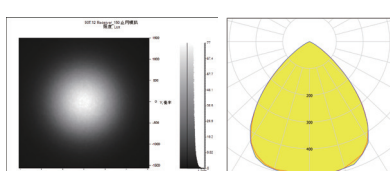


LED:LUXEON 5050 Square
 角度/FWHM:87.5°
 光效/Efficiency:89%
 峰值强度/Peakintensity:0.55CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

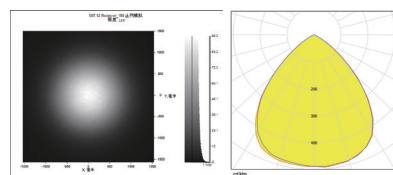


LED:LUXEON 4X3030 2D
 角度/FWHM:81.2°
 光效/Efficiency:89%
 峰值强度/Peakintensity:0.63CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

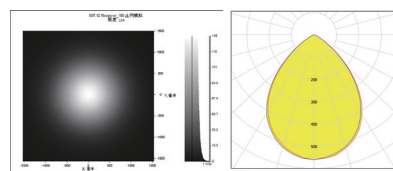


LED:SAMSUNG LH502C
 角度/FWHM:86.5°
 光效/Efficiency:89%
 峰值强度/Peakintensity:0.56CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

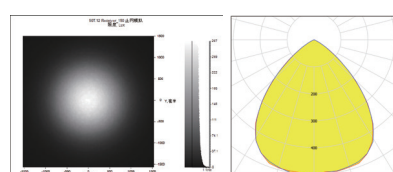


LED:SAMSUNG 4XLM281B
 角度/FWHM:80.7°
 光效/Efficiency:89%
 峰值强度/Peakintensity:0.63CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

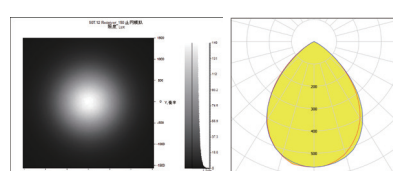


LED:SEOUL STW0L8PA
 角度/FWHM:90.6°
 光效/Efficiency:95%
 峰值强度/Peakintensity:0.52CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

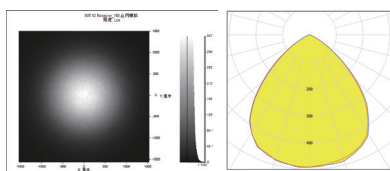


LED:CREE 5050 Square
 角度/FWHM:90.5°
 光效/Efficiency:95%
 峰值强度/Peakintensity:0.52CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

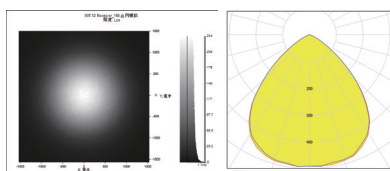


LED:OSRAM GW_P9LR34em
 角度/FWHM:91.7°
 光效/Efficiency:95%
 峰值强度/Peakintensity:0.51CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

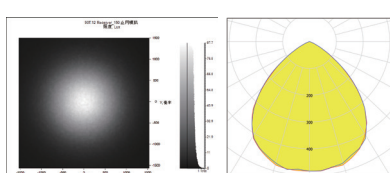


LED:LUXEON 5050 Round
 角度/FWHM:90°
 光效/Efficiency:95%
 峰值强度/Peakintensity:0.53CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

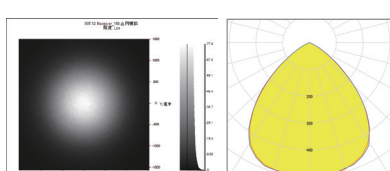


LED:LUXEON 5050 Square
 角度/FWHM:90.8°
 光效/Efficiency:95%
 峰值强度/Peakintensity:0.52CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

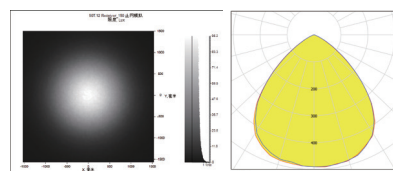


LED:LUXEON 4X3030 2D
 角度/FWHM:85.4°
 光效/Efficiency:95%
 峰值强度/Peakintensity:0.58CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:






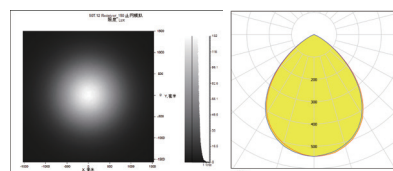


LED:SAMSUNG LH502C
 角度/FWHM:89.7°
 光效/Efficiency:95%
 峰值强度/Peakintensity:0.53CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

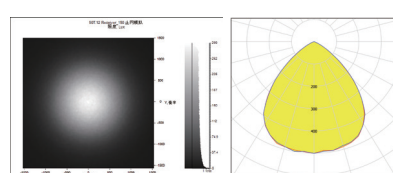

LED:SAMSUNG 4XLM281B
 角度/FWHM:84.8°
 光效/Efficiency:94%
 峰值强度/Peakintensity:0.58CD/LM
 光学面数量/LED/each optic:6
 灯光颜色/Light colour: 白色/White
 所需组件/Required components:

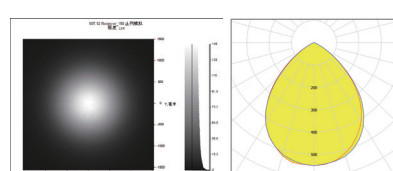

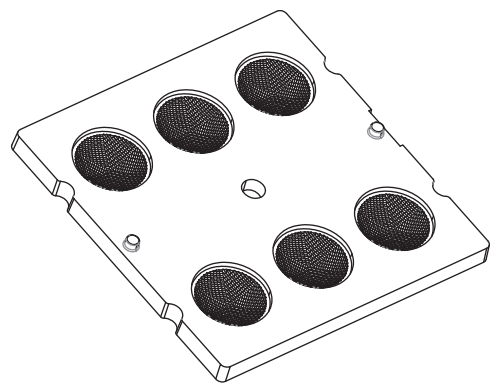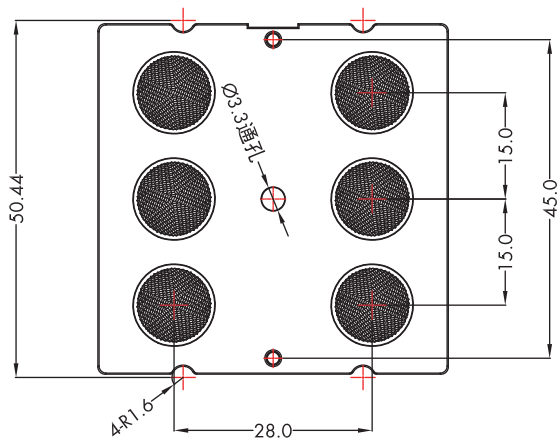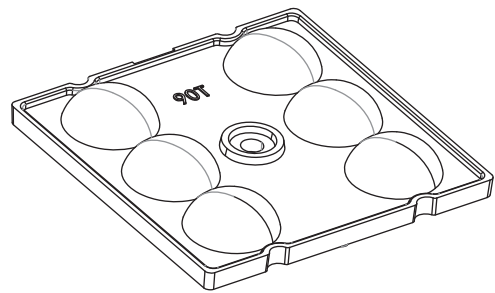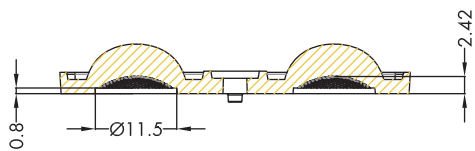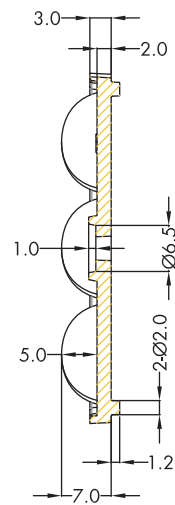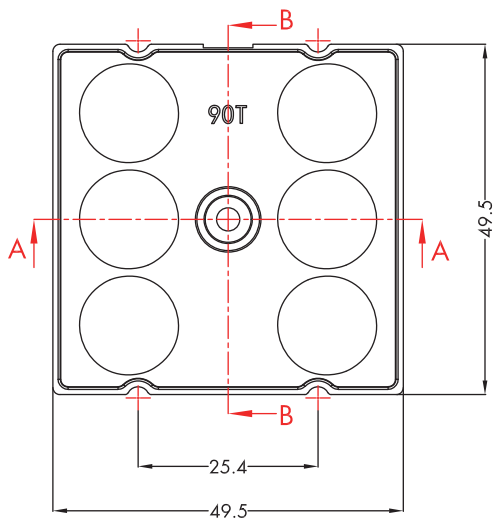


注意/NOTE:
1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。
The surface of the lens should be smooth without scratches, bubbles, dents and black spots.

GENERAL TOL ERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M (除非另有说明)	MATERIL 材质	PMMA or PC	DRAWING TITLE 绘图标题	ILENS770-R5050-90T-6H1-NH
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°

产品包装/PRODUCTS PACKAGING

Part NO.	QTY
ILENS770-R5050-XX-6H1-NH	1000pcs
Blister-A(B)-310*240*20	50pcs
Cardboard-310*380*5	1pcs
Cardboard Box-485*315*385	1pcs

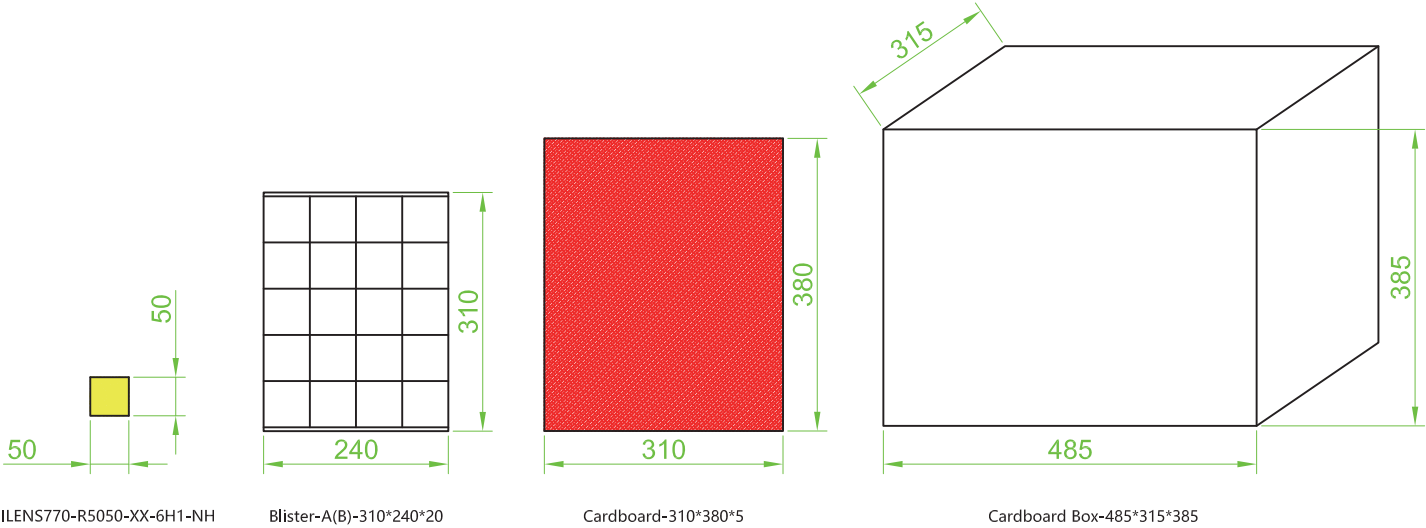

The schematic diagram:

